


imageRUNNER  
2645i / 2635i / 2630i / 2625i

**Canon**

Delighting You Always

## imageRUNNER SERIES REDEFINED

*Transform The Way You Work*

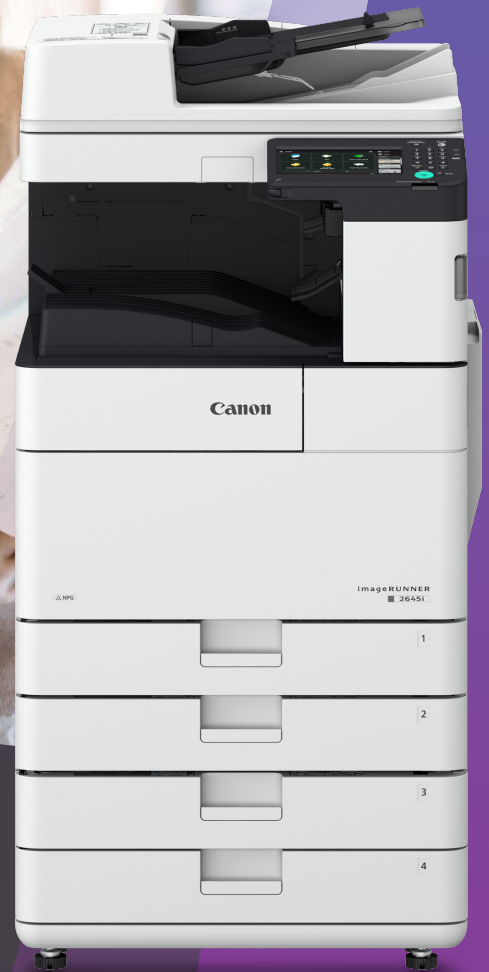

Print Up to 45 ppm

7-inch Colour Touch Panel

Mobile Print Ready

**Business Can** Be Simple

# THE NEW iR2600i SERIES

## GREATER PEACE OF MIND WITH PERFORMANCE RELIABILITY



Highly **robust** machine



Enhanced **functionalities**



Improved **performance**



## BOOSTED PRODUCTIVITY WITH HIGHER USABILITY



### 1 Higher operability with 7-inch colour touch panel

- Navigate easily with touch operations similar to a smartphone, such as flick, drag-and-drop.

### 2 Smart and sophisticated design

- Save time with quick selection and execution of last 10 used functions.

### 3 Fully customisable functions


- Personalise print functions and individual user settings to simplify workflows and increase productivity.



## MOBILE PRINTING

iR2600i series supports a wide range of mobile applications, ranging from Canon PRINT Business, Apple® AirPrint®, Google Cloud Print™, Mopria® and Canon Print Service. Printing or scanning from a mobile device has never been easier.

# IMPROVED CONNECTIVITY BETWEEN OFFICE IT EQUIPMENT

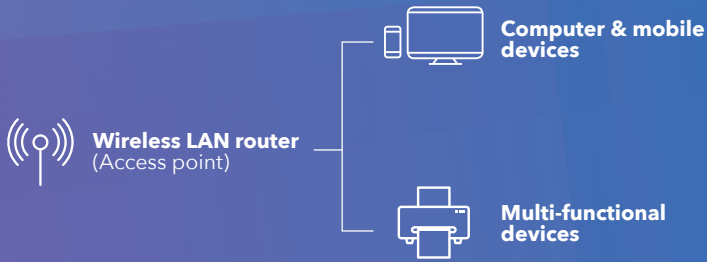

## A POWERFUL AND SECURE MULTI-FUNCTIONAL PRINTER FOR YOUR BUSINESS



### Provide security measures based on your needs

- Enjoy greater document security with Encrypted PDF, Device signature PDF and optional User signature PDF.
- Secure office environment with available network security functions such as SNMP v3, IEEE 802.1x and dual network.



### Manage your prints with uniFLOW Online Express

- Prevent unauthorised prints by limiting access with authentication.
- Track usage and manage costs with an intuitive dashboard supported by personalised widgets.
- Prevent unintended or incorrect outputs when paired with forced-hold print feature, to temporarily hold documents in each device.



### Convert paper files to electronic data easily

- Convert paper originals into electronic data, including Microsoft PowerPoint\* (.pptx format) and Word\* (.docx format) so work can be done with an easily editable format.
- Retain document style while creating text searchable\* documents, reducing the need for manual input.

*\*Optional*



# SPECIFICATIONS

Main unit	
Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Control panel	Standard: 7-inch TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Interface Connection	Network: 1000Base-T / 100Base-TX / 10Base-T, Wireless LAN (IEEE 802.11 b / g / n) Others: USB 2.0 (Host) x3, USB 2.0 (Device) x1
Print / Copy speed	iR 2645i: 45 ppm (A4), 22 ppm (A3) iR 2635i: 35 ppm (A4), 22 ppm (A3) iR 2630i: 30 ppm (A4), 15 ppm (A3) iR 2625i: 25 ppm (A4), 15 ppm (A3)
Memory media	Standard: USB memory
Paper supply capacity (A4, 80gsm)	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-AN1)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 545 sheets (with Inner Finisher-J1)
Supported media weights	Paper cassettes (1 / 2): 60 to 128 gsm Multi-purpose tray: 52 to 220 gsm (Thin vertical grain paper feed only: 52 to 59 gsm) Duplex: 60 to 105 gsm
Warm-up time (Quick start mode: ON)	From power-on: 12 seconds or less* From sleep mode: 10 seconds or less  *Time from power-on, until copy ready
Dimensions (W x D x H)	iR 2645i / 2635i: 586 x 709 x 926 mm (with DADF-BA1)* iR 2630i / 2625i: 586 x 713 x 912 mm (with DADF-AZ1)* iR 2625i: 586 x 700 x 818 mm (with Platen Cover type Z)  *With the multi purpose tray extended
Weight	Standard: iR 2645i / 2635i: Approximately 68.3 kg without toner iR 2630i / 2625i: Approximately 66.8 kg without toner
Power source	220-240 V, 5.2 Amp
Power consumption	Maximum: Approximately 1,500W Standby: Approximately 20W Sleep mode: Approximately 0.6W

Print specifications	
Print resolution (dpi)	1,200 x 1,200
Page description language	Standard: UFR II, PCL 6 Optional: Genuine Adobe® PostScript® 3™
Operating system	UFR II: Windows® 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019, MAC OS X (10.9 or later) PCL: Windows® 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019 PS: Windows® 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019, MAC OS X (10.9 or later) PPD: Windows® 7 / 8.1 / 10, MAC OS X (10.9 or later)

Copy specifications	
First-Copy-Out Time (A4)	iR 2645i / 2635i: Approximately 3.9 seconds or less iR 2630i / 2625i: Approximately 5.9 seconds or less
Copy resolution (dpi)	Reading: 600 x 600 Printing: Up to 1,200 x 1,200
Multiple copies	Up to 9,999 copies

Send specifications	
Destination	Email / I-Fax (SMTP), SMB, FTP, WebDAV, Super G3 FAX (Optional)
Address book	LDAP (2,000) / Local (1,600) / One-touch (200)
Send resolution (dpi)	Push: 600 x 600 Pull: 600 x 600, 400 x 400, 300 x 300, 200 x 200, 150 x 150, 75 x 75
Communication protocol	File: FTP (TCP / IP), SMB (TCP / IP), WebDAV Email / I-Fax: SMTP (Send), POP3 (Receive)
File format	Standard: TIFF (MMR), JPEG*, PDF (Compact, PDF A / 1-b, Encrypted), XPS (Compact), PDF / XPS (Device signature) Optional: PDF (Trace & smooth), PDF / XPS (User signature, Searchable), Office Open XML (PowerPoint, Word)

\*Single page only

Scan specifications	
Selectable type (Optional)	iR2645i / 2635i: Document Feeder (DADF-BA1) or Platen Cover Type Y iR2630i / 2625i: Document Feeder (DADF-AZ1) or Platen Cover Type Z
Document feeder paper capacity (80 gsm)	DADF-BA1: 100 sheets DADF-AZ1: 50 sheets
Scan speed (ipm: BW / CL; A4)	DADF-BA1: 1-sided scanning: 55 / 55 (BW / CL; 300 dpi), 45 (BW; 600 dpi) 2-sided scanning: 27.5 / 27.5 (BW / CL; 300 dpi), 22.5 (BW; 600 dpi) DADF-AZ1: 1-sided scanning: 35 / 25 (BW / CL; 300 dpi), 25 (BW; 600 dpi) 2-sided scanning: 12 / 8 (BW / CL; 300 dpi), 8 (BW; 600 dpi)
Scan resolution (dpi)	Copy: 600 x 600 Send: (Push) Up to 600 x 600, (Pull) Up to 600 x 600 Fax: Up to 600 x 600
Pull scan specifications	Colour Network ScanGear2 for both TWAIN and WIA

Fax specifications	
Optional / standard	Optional on all models
Maximum number of connection lines	1
Modem speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine / Photo), 200 x 100 (Normal)
Fax memory	Up to 30,000 pages
Speed dials	Max. 200
Group dials / destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes

Security specifications	
Authentication	Standard: uniFLOW Online Express, User Authentication, Department ID Authentication, Access Management System, Picture Login Optional: My Print Anywhere secure print (Requires uniFLOW)
Network	Standard: IP / Mac address filtering, IPSEC, TLS encrypted communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP authentication, POP authentication before SMTP, S/MIME
Document	Standard: Secure print, Encrypted PDF, Encrypted secure print, Device signature Optional: User signature

Consumables	
Toner cartridge/s	NPG-84 Toner Black
Toner (Estimated yield @ 6% coverage)	Black: 30,000 impressions (A4)

Paper supply options	
Cassette Feeding Unit-AN1	Paper Capacity: 550 sheets x 2 (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched Paper Size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182 to 297 x 431.8 mm Paper Weight: 60 to 128 gsm Power Source: From the main unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approximately 23.5 kg

Other accessories and supplies	
Envelope Feeder Attachment-D1, Inner 2Way Tray-L1, Inner Finisher-J1, Copy Card Reader-F1, IC Card Reader Box-C2, Copy Card Reader Attachment-H3, Utility Tray-B1, Document Tray-J1, Platen Cover Type Z, Platen Cover Type Y, DADF-AZ1, DADF-BA1, PCL International Font Set-A1, PS Printer Kit-BT1, Universal Send Digital User Signature Kit-C1, Universal Send Advanced Feature Set-H1, Barcode Printing Kit-D1, Copy Control Interface Kit-D1, Super G3 Fax Board-AV2, Remote Fax Kit-A1, ADF Access Handle-A1, Staple-P1	

**Canon**

Delighting You Always

**SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place, #15-10, Galaxis, Singapore 138522

Tel : 65-6799 8888 | Fax : 65-6799 8882 | www.canon-asia.com

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document. Canon and Business Can Be Simple are trademarks of Canon Inc, and/or its affiliates. Other names may be the trademarks for their respective owners.

DEALER'S STAMP

[www.HiTechEnterprises.in](http://www.HiTechEnterprises.in)

Call: 9930 201 201  
7666 201 201  
02242646060